
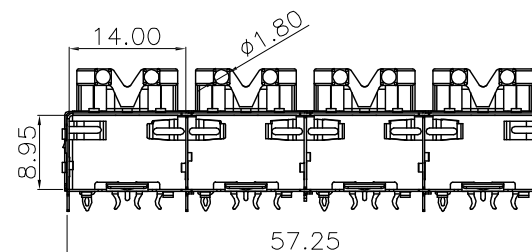
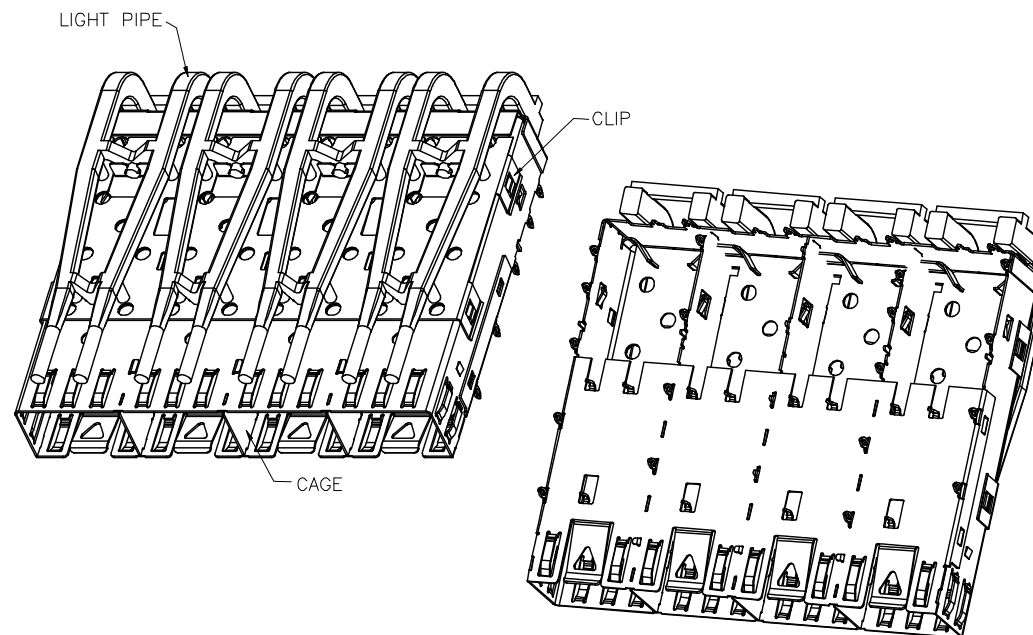


RoHS Compliant

更改 REV	设计内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图面发行	2012/10/29	LINYUN	ZHANG

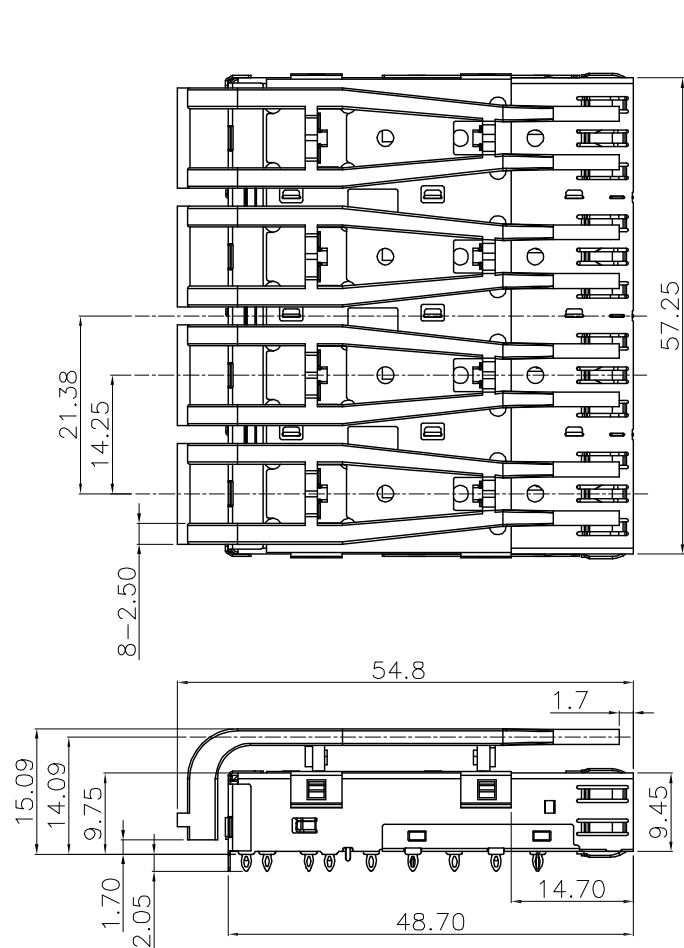


NOTES:
MECHANICAL:
CAGES: COPPER ALLOY, THICKNESS 0.25MM.
PLATING: NO NEED.
THIS CAGE IS FOR SINGLE SIDE USE ONLY.
TEMPERATURE:
OPERATION: -40°C~+85°C
STORAGE: -40°C~+85°C
RoHS COMPLIANCE.

4. 此产品包装出货详见2/4页图面说明



HTTPS://WWW.CHNCONN.COM		深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO., LTD			
◎ : Inspection Item ◎ : Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		图 号 DWG NO.		料 号 PART NO.
			SFP-1X4-GZP		CQ047SFP-1X4-L2-P
	TOLERANCE UNLESS OTHERWISE SPECIFIED		名 称 TITLE		
	.X± 0.25 X°.± 1°		SFP CAGE 1X4 PRESS FIT WITH LIGHTPIPE		
	.XX± 0.20 .X°.± 0.5°				
◎ : Inspection Item ◎ : Cp/Cpk and SPC Control Item	.XXX± 0.15				
	核准 APPROVE	审核 CHECK	制 图 DRAW	画法 PROJ.	
	ZHANG LIJY		LINYUN		图幅 SHEET
			比例 SCALE		1 : 1
			图幅 SIZE		A3
				更改 REV	A

RoHS Compliant

更改 REV	设计内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图面发行	2012/10/29	LINYUN	ZHANG

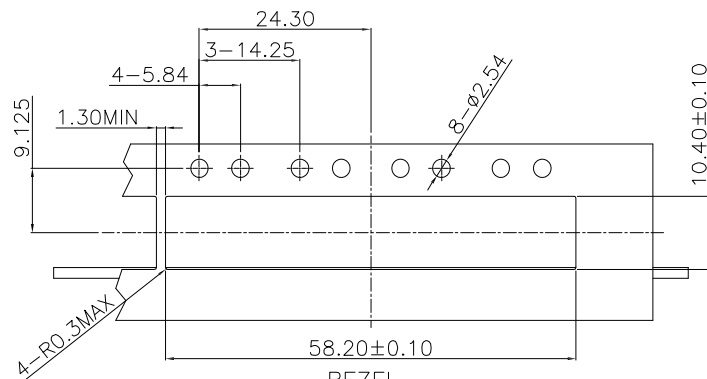

BEZEL
RECOMMENDED PANEL CUTOUT AND PC BOARD
PANEL POSITION AND THICKNESS 0.8-2.6

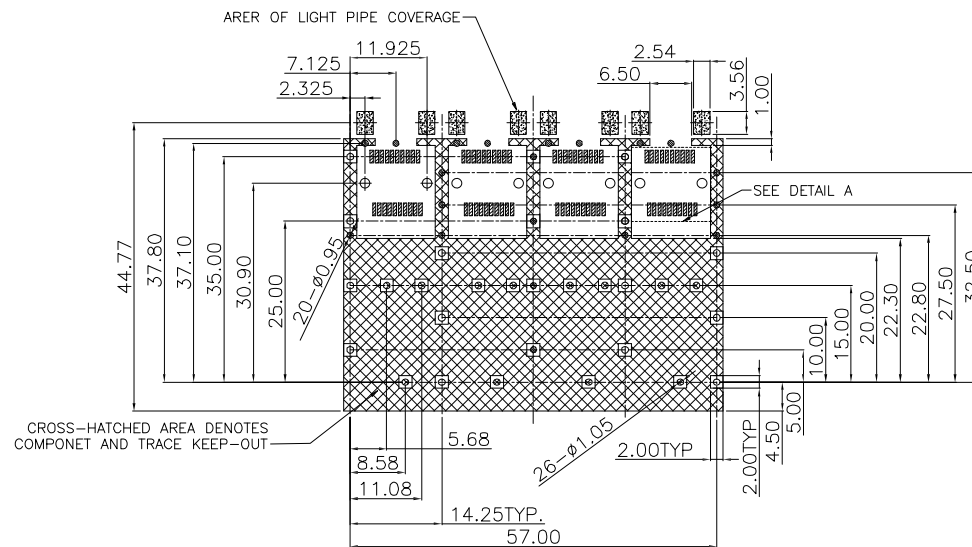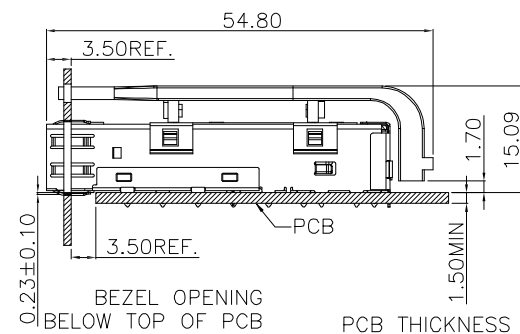


RECOMMENDED PCB LAYOUT (COMPONENT SIDE)

RECOMMENDED MINIMUM PCB THICKNESS:1.50mm
(ALL TOLERANCES ARE ±0.05)

“回” “口” “圆孔均为通孔

RECOMMENDED PCB CONFIGURATION WITH KEEP-OUT
AREAS SINGLE SIDED APPLICATIONS



DETAIL A(SCALE 2:1)

HTTPS://WWW.CHNCONN.COM		深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO.,LTD.						
QC : Inspection Item CPK : Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		图号 DWG NO.	料号 PART NO.				
	TOLERANCE UNLESS OTHERWISE SPECIFIED		SFP-1X4-GZP	CQ047-SFP-1X4-L2-P				
	.X± 0.25	X°± 1°	名称 TITLE SFP CAGE 1X4 PRESS FIT WITH LIGHTPIPE					
	.XX± 0.20	.X°± 0.5°						
	.XXX± 0.15							
核准 APPROVE	审核 CHECK	制图 DRAW	画法 PROJ.		页数 SHEET			
ZHANG	LIJY	LINYUN	比例 SCALE	1:1	图框 SIZE	A3	页次 REV	A